

“Gheorghe Asachi” Technical University of Iasi, Romania



FRACTIONATION OF ZINC IN MUNICIPAL SOLID WASTE LANDFILL LEACHATE: EFFECT OF LEACHATE RECIRCULATION

Jun Yao^{1,2}, Wenbing Li³, Qingna Kong¹, Huayue Zhu¹, Yuyang Long⁴, Dongsheng Shen^{4*}

¹College of Life Science, Taizhou University, Linhai 317000, China

²Department of Environmental Engineering, Zhejiang University, Hangzhou 310029, China

³College of Life and Environmental Sciences, Hangzhou Normal University, Hangzhou 310036, China

⁴Zhejiang Provincial Key Laboratory of Solid Waste Treatment and Recycling, College of Environmental Science and Engineering, Zhejiang Gongshang University, Hangzhou, 310018

Abstract

Two sets of simulated landfill reactors, namely conventional landfill (CL) and leachate recirculated landfill (RL) were operated to investigate the effect of leachate recirculation on the fractionation of Zn in municipal solid waste (MSW) landfill leachate. Zn in landfill leachate was fractionated into three fractionations: particulate and colloidal matter >0.45 μm, non-labile complexes <0.45 μm and free cations/labile complexes <0.45 μm. The result showed that the recirculation could decrease the total concentration of Zn in the leachate. The leached Zn was mainly present as free cations/labile complex and non-labile complexes at the beginning of the study. However, it was mainly present as particulate and colloidal matter >0.45 μm and non-labile complexes at the end of the study, for both of landfills. The recirculation of leachate could facilitate the transformation of the fractionation of Zn. Moreover, large amounts of Zn mainly present as free cations/labile complexes and non-labile complexes were leached out from CL, while only small amounts of Zn mainly present as was particulate and colloidal matter >0.45 μm were leached out from RL all through the study. It suggested the leachate recirculation not only reduced total leaching amounts of Zn, but also decreased the bioavailability and toxicity of the leached Zn.

Key words: fractionation, landfill, leachate recirculation, Zn

Received: July, 2013; *Revised final:* June, 2014; *Accepted:* June, 2014; *Published in final edited form:* February 2018

1. Introduction

Landfill is still the most widely used technology for the disposal of municipal solid waste (MSW), especially in developing countries. In China, more than 90% of MSW is disposed by landfill (Long et al.

the relatively acidic condition. In some case studies, the pH of landfill leachate can be lower than 5.0. Such an acidic condition can greatly facilitate the mobility of heavy metals and increase the risk of pollution. Among the heavy metals in the leachate, Zn is of particular interest. Firstly, the content of Zn is relatively high in MSW compared to other heavy metals (Yao et al., 2013; Prechthai et al., 2008). Secondly, it has a high leaching potential according to the previous studies (Long et al., 2010a, 2010b). Furthermore, Zn has a certain biotoxicity to the surrounding ecosystem (Wang et al., 2010; Zhang et al., 2017). It was thus selected for the discussion herein.

Nowadays, the concentration of Zn in the leachate is commonly determined for the surveillance purpose as the total content. This method quantifies the total discharge from the landfills, but does not give a real indication of the environmental load caused by Zn (Wu et al., 2011). The physico-chemical form of Zn is a critical factor influencing its mobility, bioavailability and toxicity. For example, Zn present as free ion or labile complexes (which can easily dissociate) is generally more harmful than Zn present as non-labile complexes, since Zn in free ion form is both more mobile and easily absorbed into the tissue of marine organisms (Øygaard et al., 2007). Therefore, it is crucial to specify the physico-chemical form of Zn in the leachate. Generally, there are two approaches for the speciation of metals in aquatic environment: physical method and chemical method. The physical method was related to the size/molecular weights of the species. The screen filtration is the most widely used physical method. Pore size of 0.45 μm is often suggested in standard protocols for water samples as the cutoff diameter between dissolved and particulate matter (Baun and Christensen, 2004; Matura et al., 2010). The chemical fractionation is related to the chemical form of the species like free ions and complexes. The ion-exchange resin technique is the most used method to fractionate the dissolved species. It is often used to divide the metal complexes by their stability. In this study, the screen filtration technique and ion-exchange resin technique were combined used to fractionate Zn in the landfill leachate into three fractionations: particulate and colloidal matter >0.45 μm , non-labile complexes <0.45 μm and free cations/labile complexes <0.45 μm .

The conventional landfill usually needs a long-term maintenance due to the slow rates of decomposition. Bioreactor landfill can enhance the decomposition process with the help of leachate recirculation (Sun et al., 2014; Kong et al., 2016). The leachate recirculation has become a popular operation mode for landfills. Due to the recirculation, the leachate characteristics, such as pH, the concentration of volatile fatty acid (VFA), humic substance and sulfide etc. are changed. Therefore, the fractionation of Zn in the leachate can be altered. To assess the environmental impact of Zn discharge by the leachate from the bioreactor landfill, it is necessary to investigate the effect of leachate recirculation on the

fractionation of Zn in the leachate. Several studies have been done to characterize the fractionation of Zn in the leachate from practical landfill sites (Baun and Christensen, 2004; Jensen and Christensen, 1999; Li et al., 2009). However, to our best knowledge, the effect of leachate recirculation on the transformation of the fractionation of Zn in the leachate was rarely reported.

In this study, two landfills namely conventional landfill (CL) and leachate recirculated landfill (RL) were set up. The effect of the leachate recirculation on the transformation of fractionation of Zn in the leachate was presented. The results acquired enable a better understanding of the bioavailability and environmental impact of Zn discharge from landfills with different operation modes.

2. Materials and methods

2.1. Experimental set-up

Two sets of simulated landfill reactors were set up. One was the conventional landfill with leachate single leaching, while another was bioreactor landfill with leachate recirculation. Each of the reactors was 0.3 m in diameter and 1.0 m in height, with a total work volume of 65 L. Each landfill reactor was equipped with two outlet ports. The outlet at the top lid was used for the gas exporting, while the outlet at the bottom was used for leachate drainage and sampling. Besides, an inlet ports was equipped at the top lid of RL, which was used for the leachate recirculation. A 50 mm thick layer of gravel was placed at the bottom of each landfill to simulate a leachate collection system, and to prevent clogging of the leachate withdrawal outlets. MSW was loaded and compacted using the shovel and sledgehammer. The second gravel layer was placed on the top of the MSW to simulate intermediate cover and top drainage layer, and further to provide even distribution of the recirculated leachate. The nominal size of the gravel used for both filter layers range from 10 to 40 mm. Finally, the two landfills were sealed with gasket and silicone. Fig. 1 shows the schematic of the simulated landfill systems.

2.2. MSW

MSW used in this experiment was collected from the Kaixuan transport station of Hangzhou, Zhejiang, East China. In order to obtain a representative sample of solid waste that normally goes to the landfill, MSW was collected continuously at different time of the day. The moisture content of MSW was 64% (wet basis). The average wet density of the MSW compacted in the bioreactor landfills was 600 kg/m^3 . Larger particles of the collected MSW were all shredded into 10mm by 30 mm approximately. MSW were thoroughly mixed prior to the loading of bioreactor landfills. The main components and Zn contents of MSW utilized in this study is presented in Table 1.

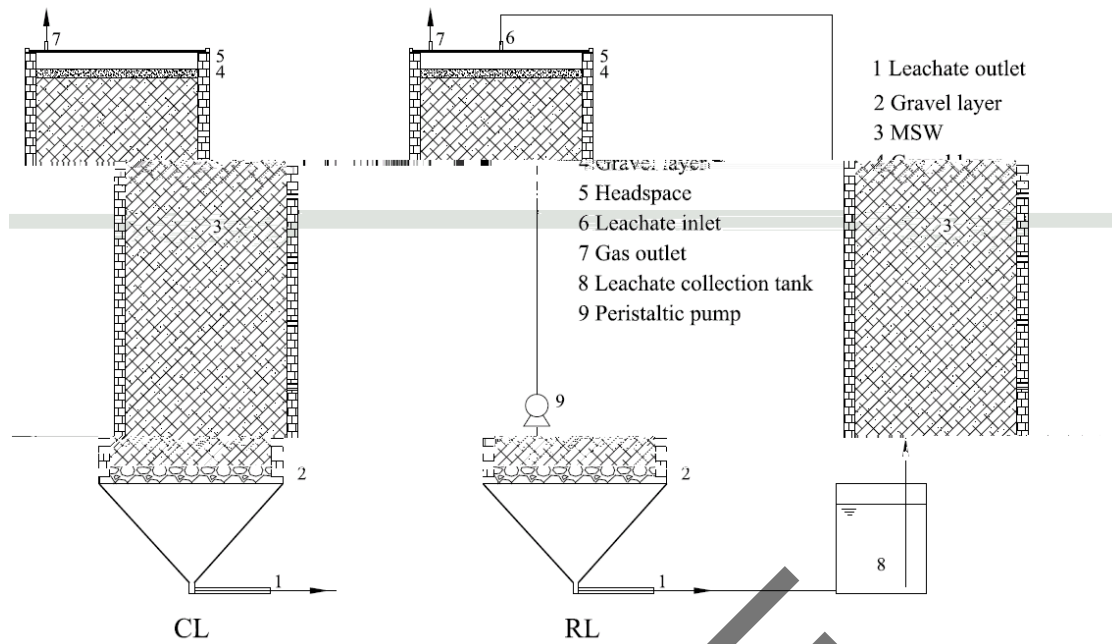


Fig. 1. Schematic of simulated landfill systems

Table 1. Components and Zn contents of experimental MSW

Components	Food waste	Plastic	Paper	Textile	Dust	Ceramic	Metal	Timber	residue
W/W, %	45.5	8.5	9.5	0.1	5.2	5.8	0.1	0.7	24.5
Content (mg/kg)	1540.5	774.5	929.1	169.4	707.6	761.7	NA	834.0	846.3

NA, not available

It showed that the food waste, the largest fraction of MSW, had the highest Zn content, which exceeded 1500 mg/kg. Besides, the content of Zn in the plastic, paper, dust, ceramic, timber and residue fraction exceeded 700 mg/kg. The high content of Zn in the MSW could result in the high concentration of Zn in the landfill leachate.

2.3. Operation of simulated landfills

Firstly, MSW was loaded and compacted using the shovel and sledgehammer. Then, the moisture content of refuse was adjusted to 75% (Benson et al., 2007) by adding tap water to the simulated landfill after loading. Leachate was collected and stored in the leachate collection tank. The leachate of CL was discarded without further treatment, while the leachate of RL was continuously recirculated using peristaltic pumps with a flow rate of 0.01 L/min every day.

2.4. Analyses

Leachate was sampled every week from the leachate outlet ports (~100 mL). In order to keep the volume equilibrium of leachate from RL before recirculation, a same volume of tap water was added back into the leachate after sampling.

Leachate samples were analyzed for volume (V), pH, dissolved organic carbon (DOC), volatile fatty acid (VFA), sulfide, sulfate, humic substance and Zn concentration. Humic substance was analyzed

according to He et al. (2006). Zn concentration was analyzed using atomic absorption spectrophotometer (Shimadzu A-650). Other analyses were performed in accordance with Standard Methods (APHA, 1999).

The fractionation of Zn in the leachate was determined according to the size charge fractionation (SCF) procedure suggested by Driscoll (1984). In the procedure, the leachate was firstly filtrated by a 0.45 µm screen filter, in which the fraction particulate and colloidal matter >0.45 µm was removed from the leachate. Then, the filtered leachate was passed through a sulphonic acid cation exchange resin, in which the Zn presented as free cations/labile complexes <0.45 µm was adsorbed on the cation exchange resin. Zn concentration in the raw leachate, filtered leachate and cation exchanged leachate was analyzed by the atomic absorption spectrophotometer. The fraction particulate and colloidal matter >0.45 µm was calculated by the difference between the Zn concentration in the raw and filtered leachate. The fraction free cations/labile complexes was calculated by the difference between the Zn concentration in the filtered leachate and cation exchanged leachate.

3. Results and discussions

3.1. Total concentration

The total concentration of Zn in the leachate from CL and RL is exhibited in Fig. 2. It showed a decreasing trend with the proceeding of the study for

both of landfills, which ranged from 1.9 to 21.0 mg/L for RL and 3.4 to 19.0 mg/L for CL. This level was at the moderate level of the range reported by the previous literatures (Baun and Christensen, 2004; Christensen et al., 2001; Kim et al., 2014). The initial concentration of Zn in RL leachate was high, which was 21.0 mg/L. It decreased sharply to 9.7 mg/L since the first time of leachate recirculation. It further decreased to 1.9-5.6 mg/L after day 15. For CL, the total concentration of Zn in the leachate decreased from 19.0 to 7.9 mg/L after 4 months. It kept at the level of 3.5-6.8 mg/L since then. The decreasing of Zn concentration in the leachate of RL and CL was generally corresponding with the variation of pH (Fig. 3). As is known, the solubility of Zn decreases with the increase of pH. The initial pH of the leachate was 4.99 for RL and 4.96 for CL, which resulted in the high level of Zn in the leachate.

With the proceeding of the study, the leachate pH increased. As a result, the concentration of Zn in the leachate was significantly decreased.

It should be noted that although the concentration of Zn decreased with the proceeding of the study, it still exceeded the limited standard issued in the ‘integrated waste water discharge standard’ (2.0 mg/L) (State Environmental Protection Administration of China, 1996) all through the study for both of landfills, indicating a great potential risk to the surrounding ecosystem. Compared to CL, the concentration of Zn in the leachate of RL was relatively low. For RL, the leached Zn was brought back to the landfill by the recirculation. Some of the Zn present as the particulate matter in the recirculated leachate could be retained by the refuse due to the action of filtration (Baun and Christensen, 2004; Wu et al., 2011).

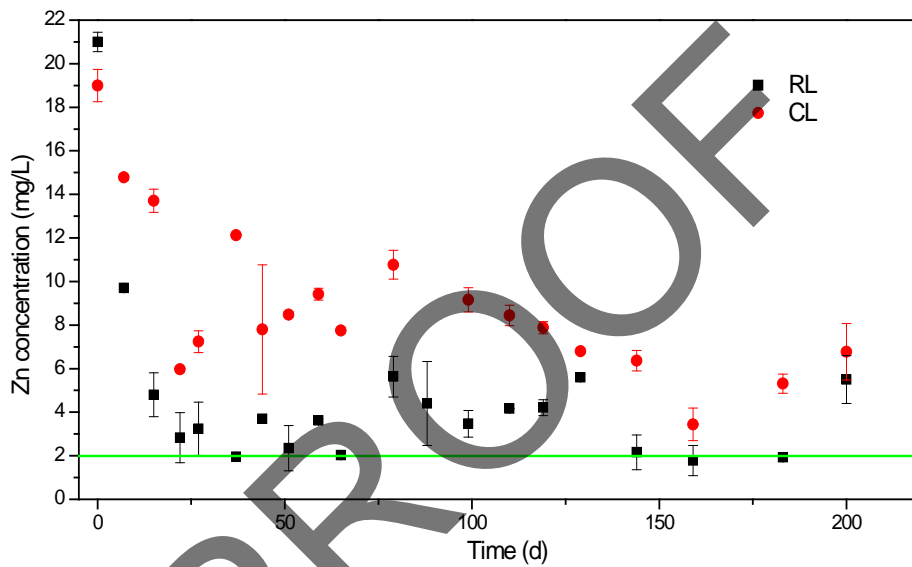


Fig. 2. Total concentration of Zn in leachate of simulated landfills (The linear line indicates the permitted concentration in the Chinese National Standards (State Environmental Protection Administration of China, 1996))


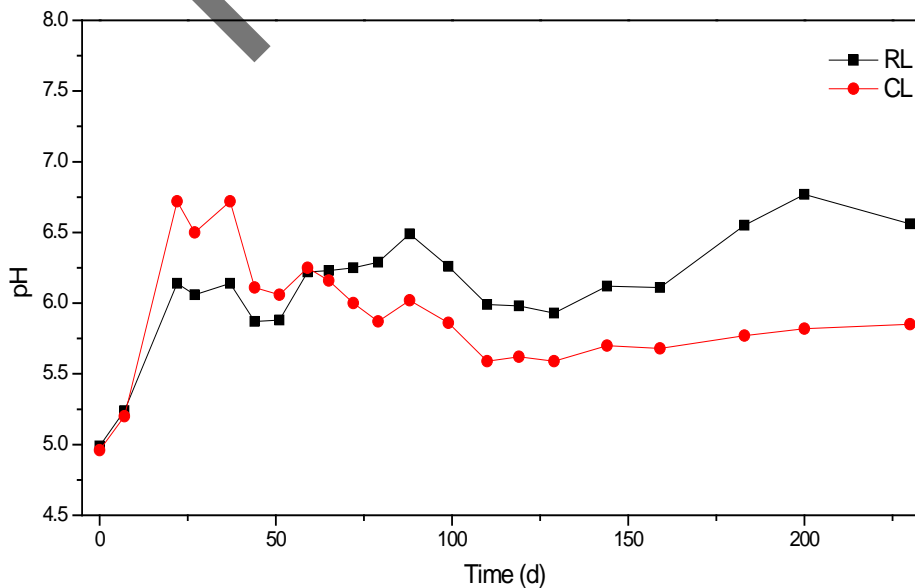


Fig. 3. Leachate pH of simulated landfills

The dissolved Zn in leachate could be immobilized by the VFA (Eq. 1), took Ac as example) (Long et al., 2009; Long et al., 2010a), S²⁻ (Eq. 2), and humic substance (Eq. 3), took fulvic acid (FA) as example) etc. in the landfill. It was also possible that a part of Zn was adsorbed by the refuse (Suna et al., 2005). Besides, the recirculation of leachate could facilitate the degradation of organic acid and accelerate the stabilization process of the landfill. This phenomenon was reflected by the evolution of pH (Fig. 3). The pH of RL leachate reached 6.5 on day 230, while it was 5.9 for the leachate of CL. The high pH of the RL leachate might be another reason for its low Zn concentration (Yao et al., 2017).



3.2. Size charge fractionation

The relative deviation of the Zn concentration in the filtered leachate and cation exchanged leachate is shown in Table 2. The relative deviation was low, which indicated the reliability of the SCF procedure. With these source data, the variation of fractionation of Zn with the proceeding of the study is calculated, as shown in Fig. 4. Zn was mainly present as the labile complexes and free cations at the beginning of the study. It accounted for 57.2% and 64.9% in the leachate of RL and CL, respectively. However, it decreased consistently to 0.6% for RL and 0.4% for CL at the end of the study. It meant most of the Zn present as labile complexes and free cation was transformed to other fractions. Similar results were also found by Papini et al. (2001) and Ward et al. (2005), which suggested the binding capacity of

leachate increased with the proceeding of the study. The non-labile complexes was another major fraction at the beginning of the study, which accounted for 42.9% for RL and 35.0% for CL. Different from the fraction free cations/labile complexes < 0.45 μm, it increased to 54.7% on day 90 for RL, and 53.7% for CL on day 50. Afterwards, the percentage of the fraction non-labile complexes decreased to 18.3% for RL and 36.0% for CL. Interestingly, the concentration of DOC and VFA showed an increasing at the initial stage of landfills (Table 3). This result indicated that some of Zn present as the free cation was combined with the moderate or small organic molecule at the initial stage of the landfill, forming the fraction non-labile complexes. However, the fraction non-labile complexes was further transformed to the fraction particulate or colloidal matter > 0.45 μm with the proceeding of the study.

The fraction particulate and colloidal matter > 0.45 μm increased consistently all through the study for both RL and CL. It increased from 0 to 81.0% for RL and 0.1 to 63.5% for CL, suggesting Zn was mainly present as particulate and colloidal matter > 0.45 μm in the mature landfill leachate.

Table 2. Relative deviation of the Zn concentration in the filtered leachate and cation exchanged leachate (%)

Time (d)	Relative standard deviation (%)	
	Filtered leachate	Cation exchanged leachate
0	5.62	8.62
15	1.56	2.45
27	2.60	0.00
37	0.48	0.00
51	0.46	5.26
79	0.03	10.58
119	11.74	5.36
183	3.40	4.12
230	5.62	8.62

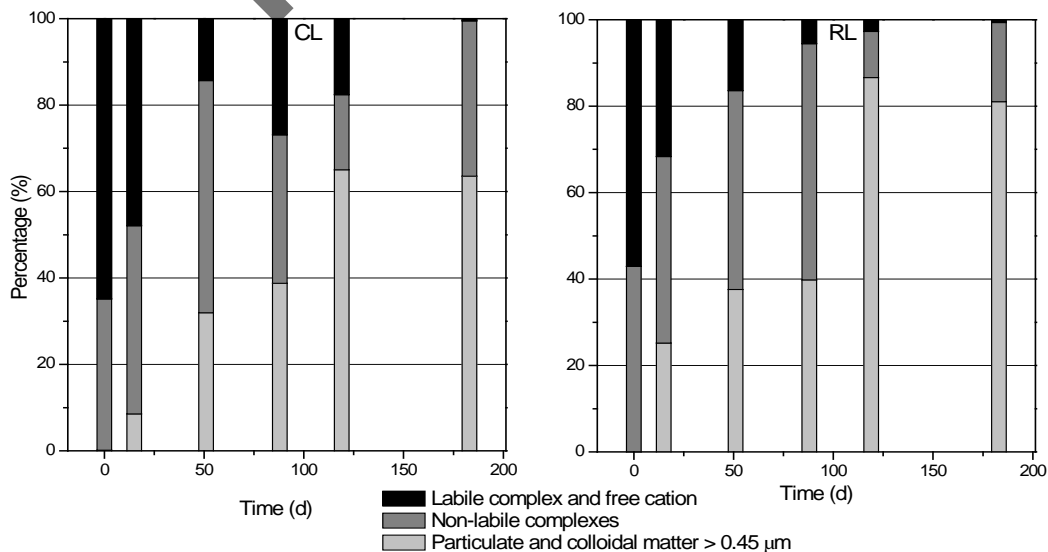


Fig. 4. Fractionation distribution of Zn in leachate from simulated landfills (Data were shown as percentage relative to total concentration)

Table 3. Concentrations of anions and organic matter in the leachate from simulated landfills (mg/L)

<i>Time d</i>	<i>DOC</i>		<i>VFA</i>		<i>Humic substance</i>		<i>Sulfides</i>		<i>Sulfates</i>	
	<i>RL</i>	<i>CL</i>	<i>RL</i>	<i>CL</i>	<i>RL</i>	<i>CL</i>	<i>RL</i>	<i>CL</i>	<i>RL</i>	<i>CL</i>
0	20433	20724	13432	14149	330	218	0.52	0.31	826	735
15	23426	18769	12196	12196	716	457	0.31	1.09	166	171

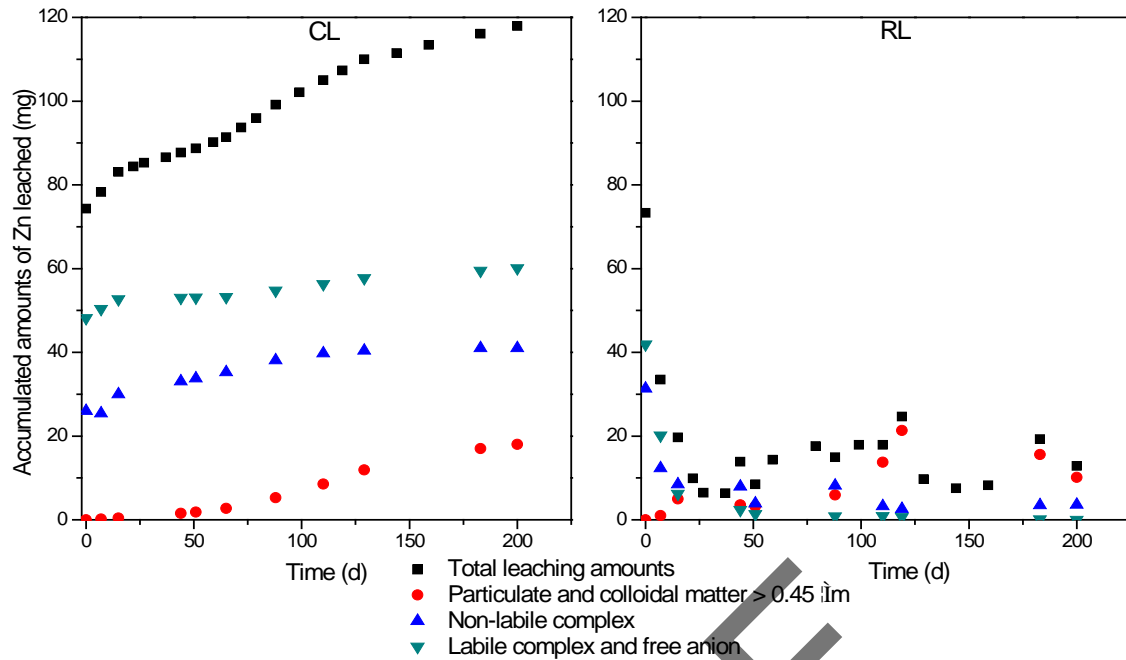


Fig. 5. Fractionation analysis of the leached Zn from simulated landfills

The leached Zn was mainly present as free cations/labile complexes <math><0.45 \mu\text{m}</math> and non-labile complexes at the initial stage of the study, but mainly present as particulate and colloidal matter >math>>0.45 \mu\text{m}</math> at the end of the study, for both of CL and RL. The leachate recirculation could facilitate the transformation of the Zn fraction from free cations/labile complexes <math><0.45 \mu\text{m}</math> and non-labile complexes to particulate and colloidal matter >math>>0.45 \mu\text{m}</math>. The results showed the operation of bioreactor landfill with leachate recirculation not only reduced total leaching amounts of Zn, but also decreased the bioavailability and toxicity of the leached Zn.

Therefore, it could be a positive way to mitigate the environmental load of the Zn leaching from the landfill. It should be noted that the result of present study mainly concerned about the initial and acidic stage of the landfill. Further study regarding the methanogenic and mature stage is required to fully understand the effect of leachate recirculation on the variation of fractionation of Zn. Besides, except for Zn, other metals which could be found in the leachate should also be investigated.

Acknowledgements

This work was financially supported by Natural Science Foundation of China with Grant NO. 41601512, Natural Science Foundation of Zhejiang province with Grant No. LQ13B070001, Science and Technology Project of Zhejiang province with Grant No. 2015C33234 and Analysis Test Project of Zhejiang province with Grant No. 2018C37069.

References

Aliakbari-Beidokhti Z., Ghazizade M.J., Gholamalifard M., (2017), Environmental impact assessment of municipal solid waste disposal site using rapid impact assessment

matrix (RIAM) analysis in Mashhad city, Iran, *Environmental Engineering and Management Journal*, **16**, 2361-2369.

APHA, (1999), *Standard Methods for the Examination of Water and Wastewater*, American Public Health Association Press, Washington D.C., America.

Baun D.L., Christensen T.H., (2004), Speciation of heavy metals in landfill leachate: A review, *Waste Management & Research*, **22**, 3-23.

Butt T.E., Gouda H.M., Bolach M.I., Paul P., Javadi A.A., Alam A., (2014), Literature review of baseline study for risk analysis-The landfill leachate case, *Environment International*, **63**, 149-162.

Benson C.H., Barlaz M.A., Lane D.T., Rowe J.M., (2007), Practice review of five bioreactor/recirculation landfills, *Waste Management*, **27**, 13-29.

Christensen J.B., Christensen T.H., (2000), The effect of pH on the complexation of Cd, Ni and Zn by dissolved organic carbon from leachate-polluted groundwater, *Water Research*, **34**, 3743-3754.

Christensen T.H., Kjeldsen P., Bjerg P.L., Jensen D.L., Christensen J.B., Baun A., Albrechtsen H.J., Heron G., (2001), Biogeochemistry of landfill leachate plumes, *Applied Geochemistry*, **16**, 659-718.

Driscoll C.T., (1984), A procedure for the fractionation of aqueous aluminum in dilute acidic waters, *International Journal of Environmental Analytical Chemistry*, **16**, 267-283.

Fauziah S.H., Nor Izzati M., Agamuthu P., (2013), Toxicity on *Anabas Testudineus*: a case study of sanitary landfill leachate, *Procedia Environmental Sciences*, **18**, 14-19.

He P.J., Xue J.F., Shao L.M., Li G.J., Lee D.J., (2006), Dissolved organic matter (DOM) in recycled leachate of bioreactor landfill, *Water Research*, **40**, 1465-1473.

Jensen D.L., Christensen T.H., (1999), Colloidal and dissolved metals in leachates from four Danish landfills, *Water Research*, **33**, 2139-2147.

Jensen D.L., Ledin A., Christensen T.H., (1999), Speciation of heavy metals in landfill-leachate polluted groundwater, *Water Research*, **33**, 2642-2650.

- Kasassi A., Rakimbei P., Karagiannidis A., Zabaniotou A., Tsiouvaras K., Nastis A., Tzafeiropoulou K., (2008), Soil contamination by heavy metals: Measurements from a closed unlined landfill, *Bioresource Technology*, **99**, 8578-8584.
- Kim H., Jiang Y.C., Townsend T., (2014), The behavior and long-term fate of metals in simulated landfill bioreactors under aerobic and anaerobic conditions, *Journal of Hazardous Materials*, **194**, 369-377.
- Kong Q.N., Yao J., Qiu Z.H., Shen D.S., (2016), Effect of mass proportion of municipal solid waste incinerator bottom ash layer to municipal solid waste layer on the Cu and Zn discharge from landfill, *BioMed Research International*, **2016**, 1-9.
- Li R., Yue D., Liu J., Nie Y., (2009), Size fractionation of organic matter and heavy metals in raw and treated leachate, *Waste Management*, **29**, 2527-2533.
- Long Y.Y., Hu L.F., Fang C.R., He R., Shen D.S., (2009), Releasing behavior of zinc in recirculated bioreactor landfill, *Science of the Total Environment*, **407**, 4110-4116.
- Long Y.Y., Shen D.S., Wang H.T., Lu W.J., (2010a), Migration behavior of Cu and Zn in landfill with different operation modes, *Journal of Hazardous Material*, **179**, 883-890.
- Long Y.Y., Wang H.T., Lu W.J., (2010b), *Migration behavior of Cu and Zn in bioreactor landfill*, The 5th Int. Conf. on Waste Management and Technology, Beijing.
- Matura M., Ettler V., Jezek J., Mihaljevic M., Sebek O., Sykora V., Klementova M., (2010), Association of trace elements with colloidal fractions in leachates from closed and active municipal solid waste landfills, *Journal of Hazardous Materials*, **183**, 541-548.
- Qi G.X., Yue D.B., Liu J.G., Li R., Shi X.C., He L., Guo J.T., Miao H.M., Nie Y.F., (2013), Impact assessment of intermediate soil cover on landfill stabilization by characterizing landfilled municipal solid waste, *Journal of Environmental Management*, **128**, 259-265.
- Øygaard J.K., Gjengedal E., Røyset O., (2007), Size charge fractionation of metals in municipal solid waste landfill leachate, *Water Research*, **41**, 47-54.
- Øygaard J.K., Måge A., Gjengedal E., (2004), Estimation of the mass-balance of selected metals in four sanitary landfills in Western Norway, with emphasis on the heavy metal content of the deposited waste and the leachate, *Water Research*, **38**, 2851-2858.
- Papini M.P., Majone M., Rolle E., (2001), Kaolinite sorption of Cd, Ni and Cu from landfill leachates: influence of leachate composition, *Water Science and Technology*, **44**, 343-350.
- Prechthai T., Parkpian P., Visvanathan C., (2008), Assessment of heavy metal contamination and its mobilization from municipal solid waste open dumping site, *Journal of Hazardous Material*, **156**, 86-94.
- Rusu L., Suceveanu M., Suteu D., Favier L., Harja M., (2017), Assessment of groundwater and surface water contamination by landfill leachate: a case study in Neamt County, Romania, *Environmental Engineering and Management Journal*, **16**, 633-641.
- Salem Z.B., Capelli N., Laffray X., Elise G., Ayadi H., Aleya L., (2014), Seasonal variation of heavy metals in water, sediment and roach tissues in a landfill draining system pond (Etueffont, France), *Ecological Engineering*, **69**, 25-37.
- Suna E.A., Fazal M.A., Onay T.T., Craig W.H., (2005), Determination of solid waste sorption capacity for selected heavy metals in landfills, *Journal of Hazardous Material*, **121**, 223-232.
- Sun F.Q., Sun B., Li Q., Deng X.Y., Hu J., Wu W.X., (2014), Pilot-scale nitrogen removal from leachate by ex situ nitrification and in situ denitrification in a landfill bioreactor, *Chemosphere*, **101**, 77-85.
- State Environmental Protection Administration of China, (1996), Integrated waste water discharge standard, State Environmental Protection Administration of China, Beijing, China.
- Wang X.D., Li B., Ma Y.B., Hua L., (2010), Development of a biotic ligand model for acute zinc toxicity to barley root elongation, *Ecotoxicology and Environmental Safety*, **73**, 1272-1278.
- Ward M.L., Bitton G., Townsend T., (2005), Heavy metal binding capacity (HMBC) of municipal solid waste landfill leachates, *Chemosphere*, **60**, 206-215.
- Wu Y.Y., Zhou S.Q., Chen D.Y., Zhao R., Li H.S., Lin Y.M., (2011), Transformation of metals speciation in a combined landfill leachate treatment, *Science of the Total Environment*, **409**, 1613-1620.
- Yao J., Kong Q.N., Li W.B., Zhu H.Y., Shen D.S., (2014), Effect of leachate recirculation on the migration of copper and zinc in municipal solid waste and municipal solid waste incineration bottom ash co-disposed landfill, *Journal of Material Cycles and Waste Management*, **16**, 775-783.
- Yao J., Qiu Z.H., Kong Q.N., Chen L.X., Zhu H.Y., Long Y.Y., Shen D.S., (2017), Migration of Cu, Zn and Cr through municipal solid waste incinerator bottom ash layer in the simulated landfill, *Ecological Engineering*, **102**, 577-582.
- Zawierucha I., Kozłowski C., Malina G., (2013), Removal of toxic metal ions from landfill leachate by complementary sorption and transport across polymer inclusion membranes, *Waste Management*, **33**, 2129-2136.
- Zhang M.L., Wang H.X., McDonald L.M., Hu Z.Q., (2017), Competitive biosorption of Pb(II), Cu(II) and Zn(II) using composted livestock waste in batch and column experiments, *Environmental Engineering and Management Journal*, **16**, 431-438.